ALL MATERIAL ARE RoHS AND CALIFORNIA PROP.65 COMPLIANT

Pb leadfree

CUSTOMER'S APPROVAL: _____ DATE: _____

FIRST ARTICLE SAMPLE REQUIRED: ☐ YES, ☐ NO.

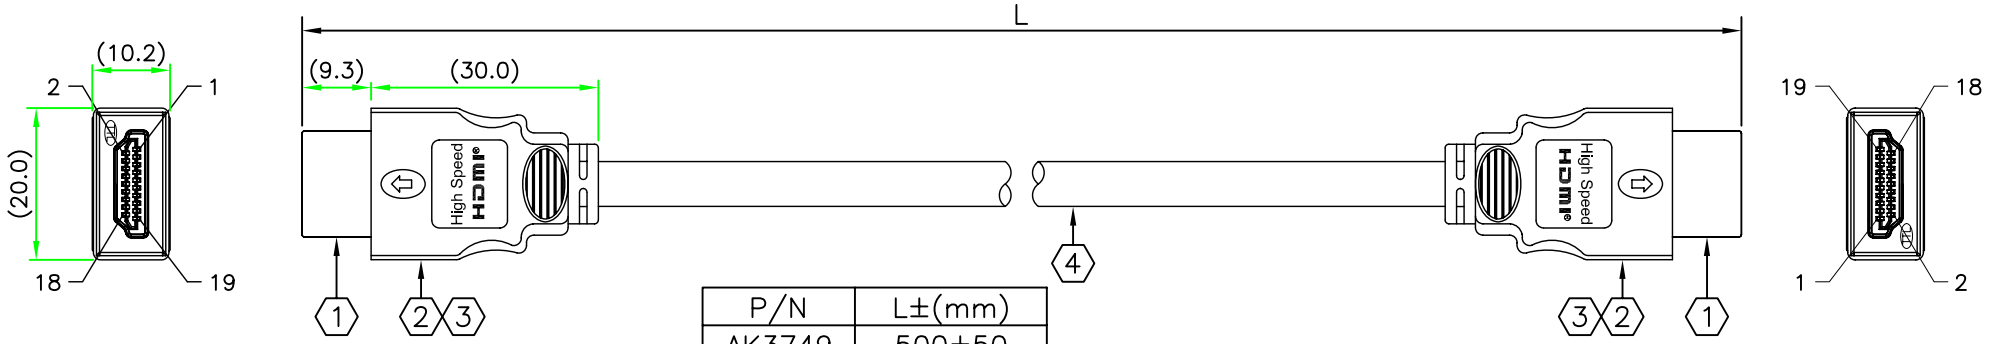

P/N	L±(mm)
AK3749	500±50
AK3755	1000±50
AK3750	2000±50
AK3751	3000±100
AK3752	5000±150

PINOUT CONFIGURATION

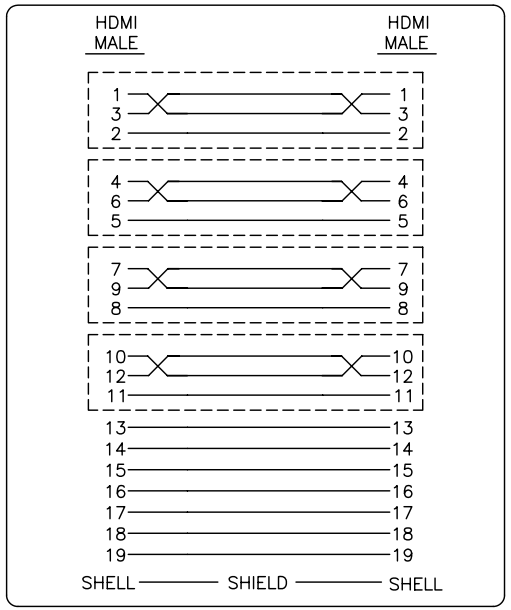

NOTE:

1. THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™SHIELDING DESIGN.
2. WIRE MARKING:

(1 INCH)

TTL® E193793 AWM 20276 80° C 30V VW-1 TOTAL TECHNOLOGIES. LTD® HIGH QUALITY

DIGITAL AV CABLE LEVEL-1 SERIES

UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	HDMI TYPE A 19PIN CONNECTOR,MALE W/GOLD PLATED PINS UL94V-0	2	PCS.
2	BLACK MOLDED PVC HOOD	2	PCS.
3	PAT. US 6,287,148 B1 RF-BLOK™SHIELDING METAL CAN	2	PCS.
4	(TWISTED PAIRS)x4+7C WIRE; AL-FOIL+85% BRAID;	SEE	DWG.
	BLACK PVC JACKET.		

REVISED DETAILS

REV.	DESCRIPTION	DATE	REVISED BY
B	CHANGE WIRE MARKING	MAR.31.08	STANLEY
C	WIRE SPEC DESCRIPTION 28AWG	FEB.01.10	STANLEY
D	ADD SIZE 1M & CHANGE LOGO & MARKING	2013.04.02	Z.Q.KANG
E	CHANGE AK3749 1M TO 0.5M	2013.04.15	Z.Q.KANG
F	ADD SIZE 1M(AK3755)	2013.05.29	Z.Q.KANG

Part number: SEE TABLE	*Revision:* F
RFQ number: 65587	*Drawing#:* 65587-2
Drawn by: X.X.WANG	*Scale:* None
Checked by:	*Date:* 06/22/2004

PAGE: 1 of 1 SALES: LILIAN